


- C1 - 150 mmfd
- C2 - 200 "
- C3 - 0,0001 mfd
- C4 - 150 mmfd
- C5 - 0,01 mfd 600v
- R1 - 0,1 megohm
- R2 - 400 ohm 2 W
- R3 - 15,000 ohm 10W
- R4 - 50,000 " 2W
- R5 - 25,000 " 100W
- R6 - 50,000 " 2W
- B - 6,3V 150 mA skellampa
- M - 0-200 mA mätare
- Sw - enpol. tvåvägsomt.


## 2 rørs sändare 60 watt; Typ N 3.



- Spolar:
- L - 1,5" i diam.
  - 1,7 Mc xtal 40V 0,6 mm tät lind.
  - 3,5 " " 20V 0,3 " 35mm "
  - 7 " " 9V 0,8 " 25mm "
  - L1 - 1" i diam.
  - 1,7-3,5 Mc 45V 0,4 " tät lind.
  - 3,5-7 " 24V 0,5 " 25mm "
  - 7-14 " 11V 1,0 " " "
  - L2 - 1 3/4" diam. 3" länge
  - 1,7 Mc 54V 1,2 mm
  - 3,5 " 33V 1,2 "
  - 7 " 15V 1,6 "
  - 14 " 11V 1,6 "
  - 28 " 6V 1,6 "

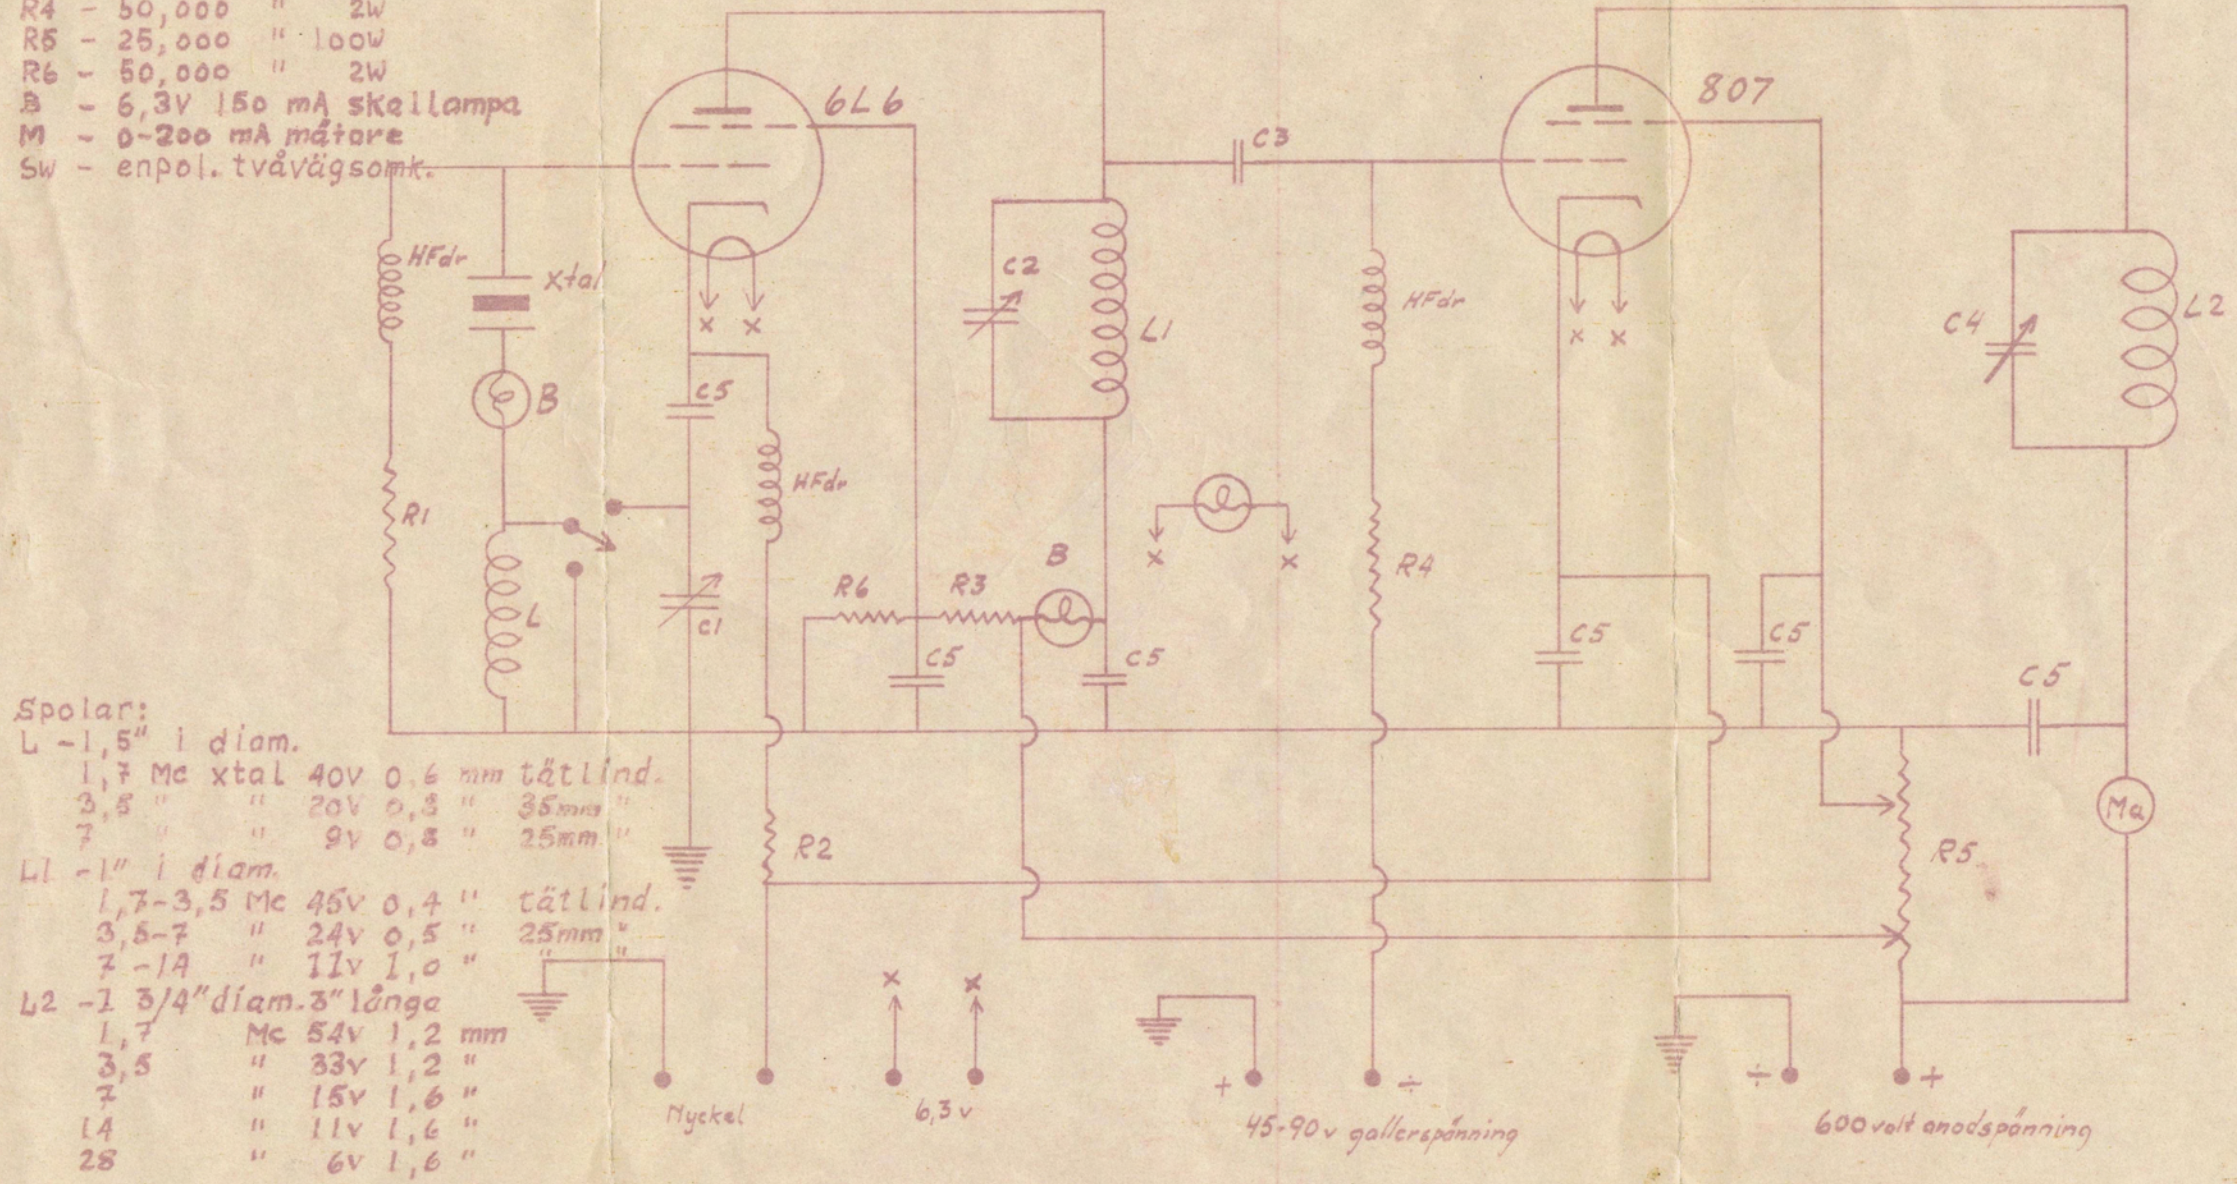

# 40 WATT ECO-PA SÄNDARE Nr R600

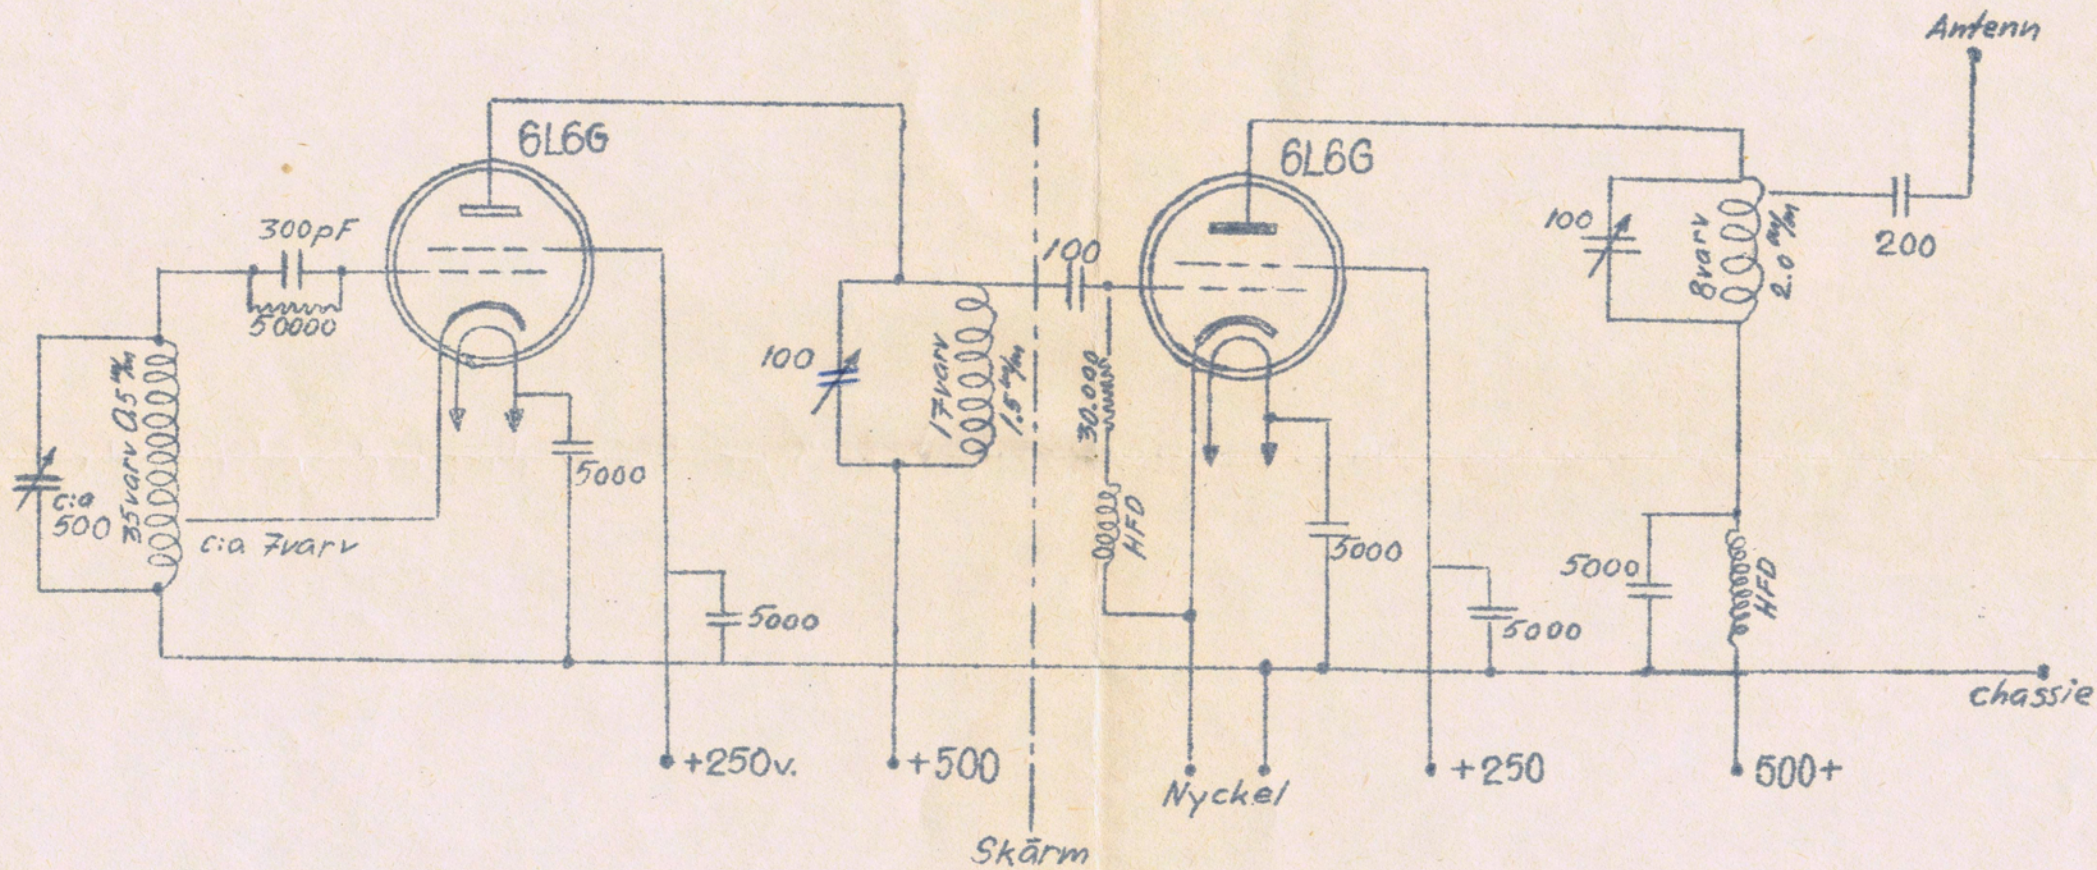


Samtliga spolar 35<sup>m</sup>/m diam.



# 60 WATT 2 RÖRS SÄNDARE

NR601 HOBBY-FÖRLAGET

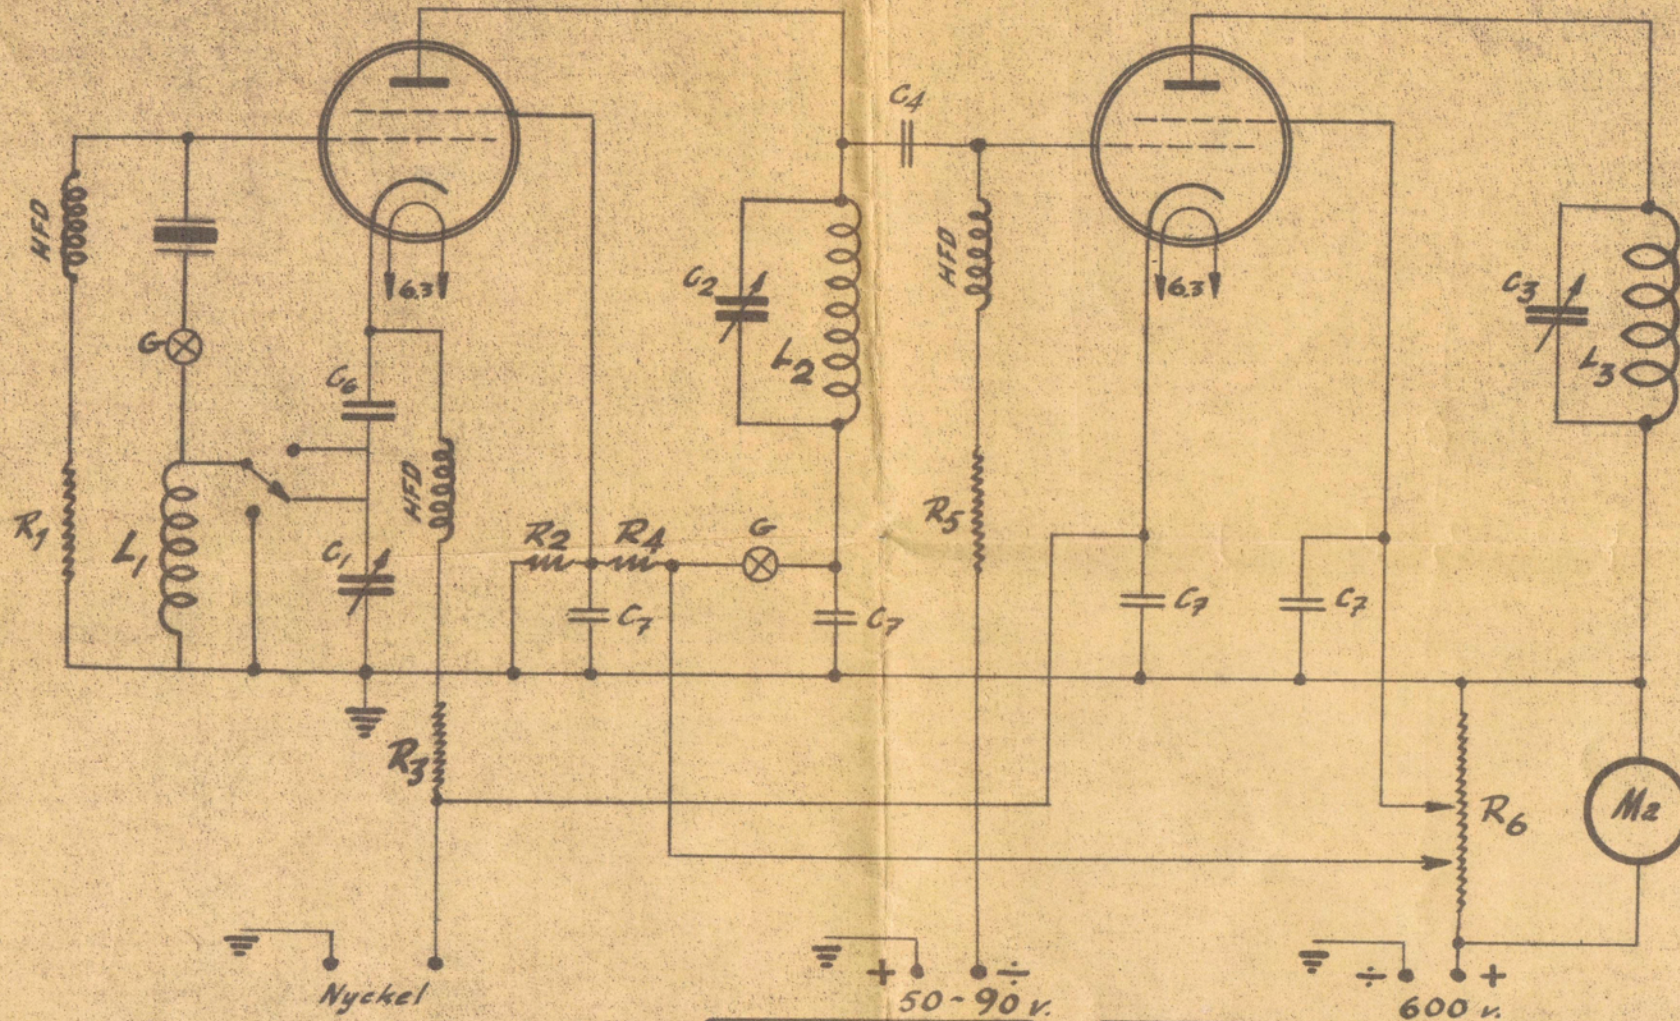

- ① 0,1 Mohm
- ② 50000 ohm 2w
- ③ 400 ohm 2w
- ④ 15000 ohm 10w
- ⑤ 50000 ohm 2w
- ⑥ 25000 ohm 100w
- ⑦ skallampa 6.3v/150mA

- ① 150 μF
- ② 200 μF
- ③ 150 μF
- ④ 0.0001 μF
- ⑤ 0,01 μF 1000v.
- ⑥ 0,01 μF 1000v.
- ⑦ 0-200 mA

L1 D=1.5"			
Band	Varv	Tråd	Längd
1.7	40	0.6	tät
3.5	20	0.8	35 <sup>m</sup> / <sub>m</sub>
7	9	0.8	25 <sup>m</sup> / <sub>m</sub>

L2 D=1"			
Band	Varv	Tråd	Längd
1.5	45	0.4	tät
3.5	24	0.5	25 <sup>m</sup> / <sub>m</sub>
7	11	1.0	25 <sup>m</sup> / <sub>m</sub>

L3 D=1 3/4"			
Band	Varv	Tråd	Längd
1.5	54	1.2	3"
3.5	33	1.2	3"
7	15	1.6	3"